



The First Name in Turf Renovation™

# LAWNNAIRE® V

Whether you're a rental house, lawn care contractor or homeowner, the Lawnnaire® V has an application to suit your needs.

This drum-style, self-propelled, high-speed precision turf aerator combines performance, durability and ease of use. Commercial grade components like a solid steel axle and hardened alloy steel coring tines ensure years of reliable performance in even the most rigorous environments. User-friendly features like the easy-to-operate, handle mounted throttle and vibration-reducing grips make operation easy and comfortable. forty-two tines spread over a 26.5-inch swath offer a productive aeration rate of nearly 40,000 square feet per hour.



## SPECIFICATIONS

### POWER

Honda®

Engine Model . . . . . 4-cycle Honda® GX120; recoil start; on/off switch; low-oil alert

Displacement . . . . . 7.2 cu in. (118 cc)

Fuel Capacity . . . . . 0.53 gal. (2 L)

Oil Capacity . . . . . 0.59 qt (0.56 L)

Briggs & Stratton®

Engine model . . . . . 4-cycle Briggs & Stratton Vanguard, recoil start; on/off switch, dual air cleaner; low-tone muffler

Displacement . . . . . 12.5 cu. In. (205 cc)

Fuel Capacity . . . . . 0.84 gal. (3.3 L)

Oil Capacity . . . . . 0.63 qt (0.6 L)

### UNIT

Clutch . . . . . Belt tightener

Drive: Primary . . . . . 4L section V-belt

Drive: Tine & Drum . . . . . Single #40 nickel-plated chain

Tines . . . . . 0.75 in. (19 mm) diameter coring type formed from 0.08 in. (2 mm) hollow, hardened alloy steel;

Number of Tines . . . . . 42 tines per aerator

Lubrication . . . . . Grease zerks on the wheels & idler pivot / oil chain

Coring Depth . . . . . Up to 2.75 in. (70 mm)

Core Diameter . . . . . 0.75 in. (19 mm)

Aerating Width . . . . . 26.5 in. (673 mm)

Aeration Pattern . . . . . 3.75 in. x 7 in. (95 mm x 178 mm)

Holes per Sq Ft . . . . . Up to 9/ sq ft (.59 / m²)

Productivity . . . . . Aerates up to 40,000 sq ft/hr (3,716 m²/hr) at 3.5 mph (4.83 kph)

Tires . . . . . (2) 8x2.25 semi-pneumatic w/ball bearings

### DIMENSIONS

Weight: Wet w/o Weights . . . . . 250 lb (113 kg)

Weight: Wet w/Weights . . . . . 292 lb (132 kg)


Weight: Wet w/Weights and Water in Drum . . . . . 357 lb (162 kg)

Width . . . . . 35.5 in. (902 mm)


Length . . . . . 53.5 in. (1,359 mm)

Height . . . . . 48.5 in. (1,232 mm)

*Specifications subject to change without notice.*

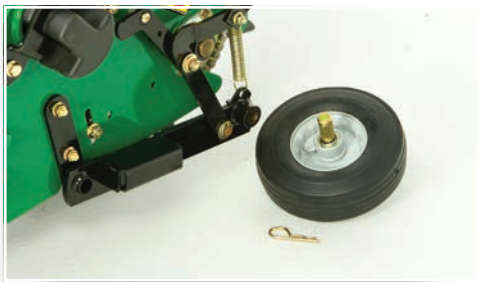

Removable rear wheels make it easy to maneuver in tight areas and through gates for increased productivity and flexibility.

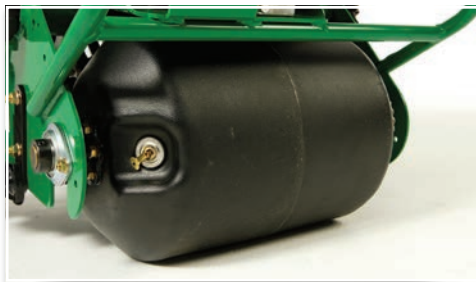

A full water drum provides improved traction and increases penetration depth in harder soils.



Standard 3/4", hardened alloy steel coring tines stand up to the daily rigors of even the most difficult jobs.

# WWW.RYANTURF.COM