



The First Name in Turf Renovation™

LAWNNAIRE® THREE-POINT HITCH AERATOR

SPECIFICATIONS

UNIT

Frame 1.5 in. (38 mm) sq x 0.1875 in. (5 mm) wall tube
 Hitch: 36 in. Model Category "0" or "1"
 Hitch: 48 in. Model Category "0" or "1"
 Aerating Wheel Axle 1.25 in. (32 mm) diameter
 Aerating Wheels Cast iron with sintered bushings;
 pressure lubrication fitting; grooved for mounting aerating
 tines on both sides; each wheel weighs 75 lb (34 kg)
 Tines 8 per wheel (48 on 36 in.; 64 on 48 in.); one set of 0.75 in.;
 (19 mm) diameter coring tines standard; wheels can
 be mounted with double tines; 16 per wheel
 Coring Depth Up to 4 in. (102 mm)
 Aerating Width: 36 in. Model 36 in. (914 mm)
 Aerating Width: 48 in. Model 48 in. (1,219 mm)
 Aeration Pattern 6 in. x 6 in. (152 mm x 152 mm) with single tines;
 3 in. x 3 in. (76 mm x 76 mm) with double tines
 Holes per Sq Ft Up to 9 with single tines;
 up to 18 with double tines

DIMENSIONS

Weight: 36 in. Model 510 lb (231 kg)
 Weight: 48 in. Model 710 lb (322 kg)
 Width: 36 in. Model 35 in. (889 mm)
 Width: 48 in. Model 47 in. (1,194 mm)
 Length 31 in. (787 mm)
 Height 34.5 in. (876 mm)

Specifications subject to change without notice.

For quality aeration done fast on medium-sized grounds like apartment complexes and sports fields, the Lawnaire 3-Point Hitch is ideal.

This popular machine is available in a 36-inch model, or choose a larger 48-inch model for wider, open lawns. The durable coring, spoon or slicing tines penetrate densely compacted soil with ease. The 36-inch model is compatible with any tractor that has a category "0" or "1" 3-point hitch capable of lifting 515 lbs. You can operate the 48-inch model with any tractor that has a category "0" or "1" 3-point hitch and is capable of lifting 715 lbs.




TINES

- 515197 Tine, Coring 3/4" (19mm), Back Discharge, Thick Wall
- 515196 Tine, Coring 1/2" (13mm), Back Discharge, Thick Wall
- 520404 Tine, Spoon

KNIVES

- 521155 Deep Slicing Knife
- 515193 Shallow Slicing Knife

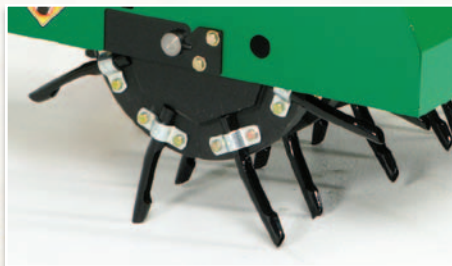

Cast iron aeration wheels have sintered bushings and lubrication fittings for durability and easy maintenance.



Reliable three-point hitch allows simple connection and is compatible with a wide variety of tractor models.

WWW.RYANTURF.COM