



The First Name in Turf Renovation™

# MATAWAY® DETHATCHERS

There's simply nothing like these ultra-versatile machines on the market.

The Mataway Dethatcher is built for heavy-duty turf renovation and dethatching. This self-propelled money maker offers user-friendly features like cutting depth control right from the operator's station. Its five different reel types are easily interchangeable. For optimal efficiency, a 19-inch working width allows you to cover up to 18,700 square feet per hour.



## SPECIFICATIONS

### POWER

Engine Model . . . . . 4-cycle Honda® GX390; recoil start;  
 on/off switch; low-oil alert  
 Displacement . . . . . 23.7 cu in. (389 cc)  
 Fuel Capacity . . . . . 1.6 gal. (6.1 L)  
 Oil Capacity . . . . . 1.16 qt (1.1 L)

### UNIT

Clutch . . . . . Spring-loaded belt tightener  
 Drive . . . . . 4L-section V-belt to front wheels by gear box and  
 sealed roller chain; triple 3V-section V-belts engine to reel  
 Lubrication . . . . . Oil splash in gear case,  
 pressure grease fitting elsewhere  
 Cutting Depth . . . . . Adjustable for any desired depth to 1.5 in. (38 mm)  
 Slicing Width . . . . . 19 in. (483 mm)  
 Tires: Front . . . . . (2) 4.10/3.50 x 4, 2-ply semi-pneumatic, knob tread  
 Tires: Rear . . . . . (2) 4.10/3.50 x 4, 2-ply semi-pneumatic, sawtooth tread  
 Productivity: . . . . . Single Pass: 80%; 18,700 sq ft/hr (1737 m<sup>2</sup>/hr)  
 Double Pass: 80%; 9,400 sq ft/hr (873 m<sup>2</sup>/hr)

### OPTIONAL VERTICAL SLICER/DETHATCHER REELS

Flail Blade Type . . . . . 1/8 in. (3 mm) at 1 in. (25 mm) spacing  
 Fixed Blade Type . . . . . 1/32 in. (1 mm) at 1/2 in. (13 mm) spacing;  
 1/32 in. (1 mm) at 1 in. (25 mm) spacing;  
 1/16 in. (2 mm) at 1 in. (25 mm) spacing;  
 1/16 in. (2 mm) at 1 1/2 in. (38 mm) spacing

### DIMENSIONS

Weight: Wet-Dethatcher . . . . . 376 lb (171 kg) w/o reel  
 Width . . . . . 35.5 in. (902 mm)  
 Length . . . . . 50 in. (1,270 mm)  
 Height . . . . . 44 in. (1,118 mm)


Specifications subject to change without notice.



Self-propelled unit makes for easy operation and consistent ground speed.



Durable cutting blades can be adjusted down to a depth of 1 1/2".

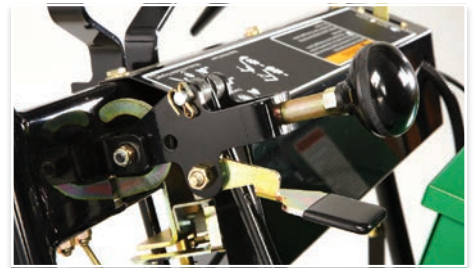

Adjust the engine throttle and set the cutting depth right from the operator's station.

# WWW.RYANTURF.COM